# Chi-1 frequency distributions
## ensemble_analyzed (20 models)

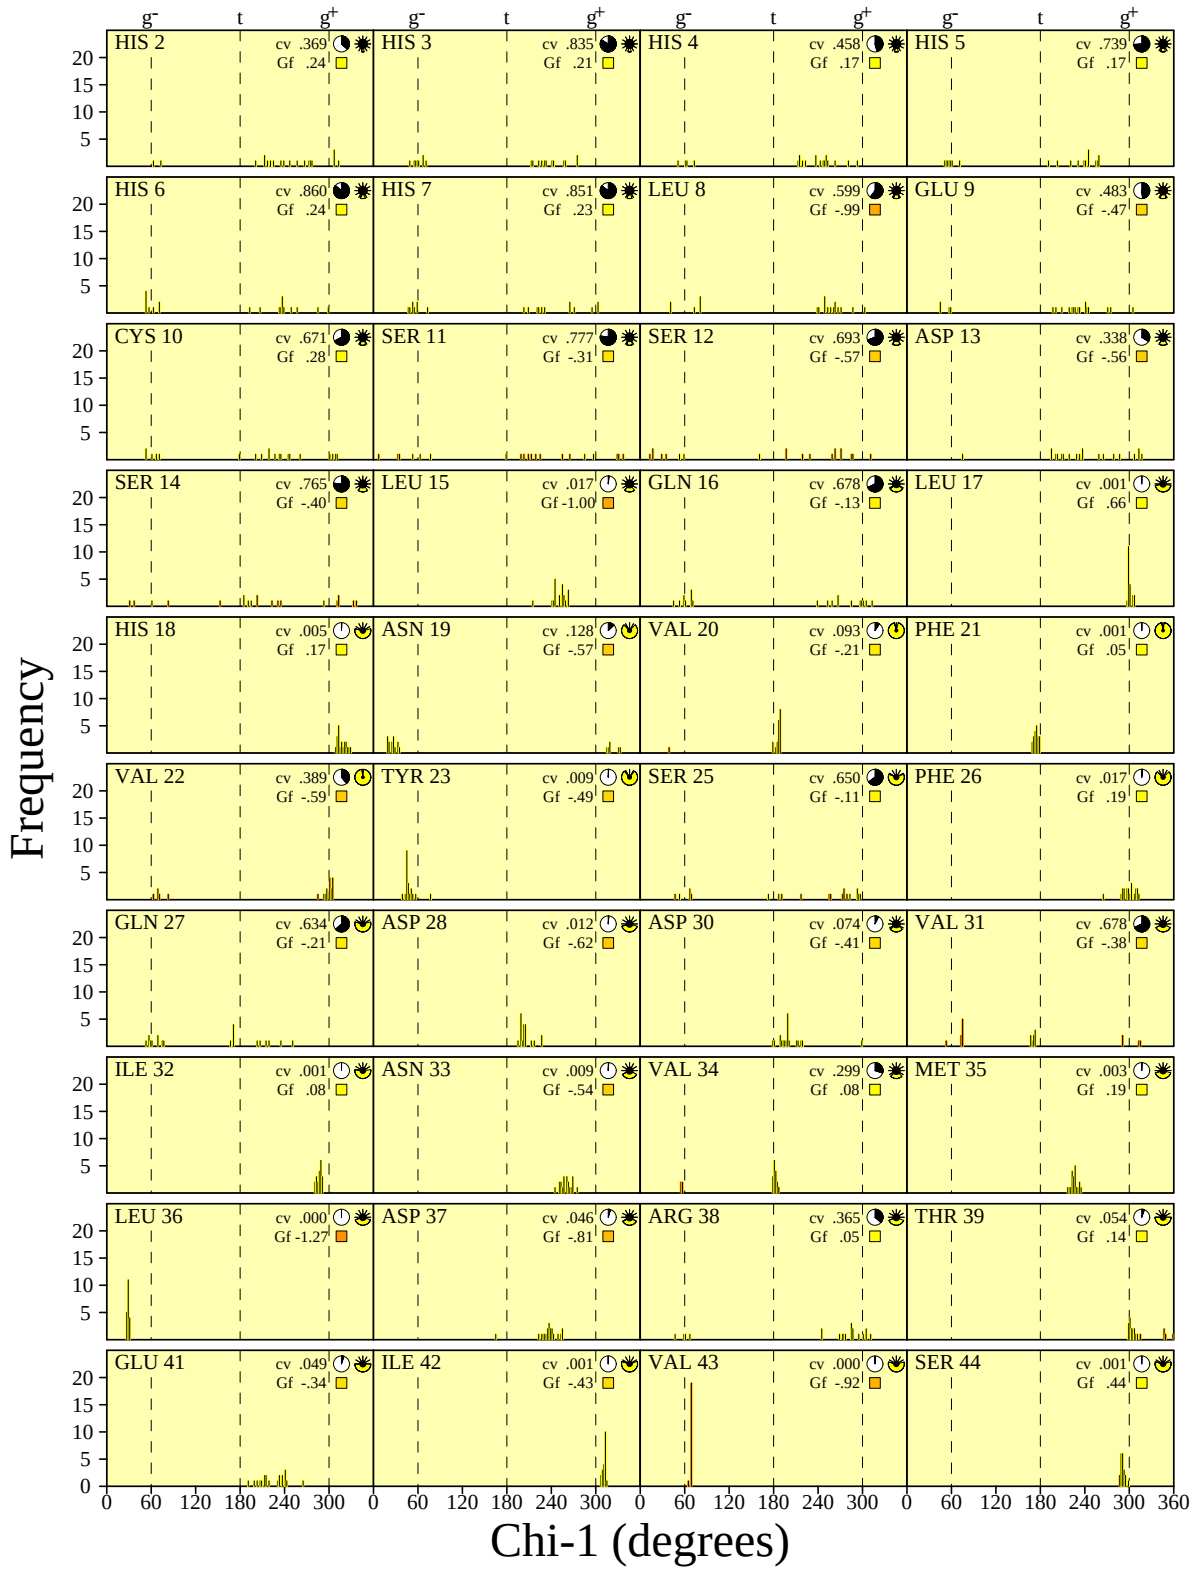


cv = Circular Variance (low values signify high clustering of the data points). Accessible Buried
Gf = Average G-factor for the residue (the higher the value the more favourable the conformations) based on analysis of high-res. Xstal structures
Data bars coloured according to G-factor: Favourable Unfavourable

# Chi-1 frequency distributions
## ensemble_analyzed (20 models)

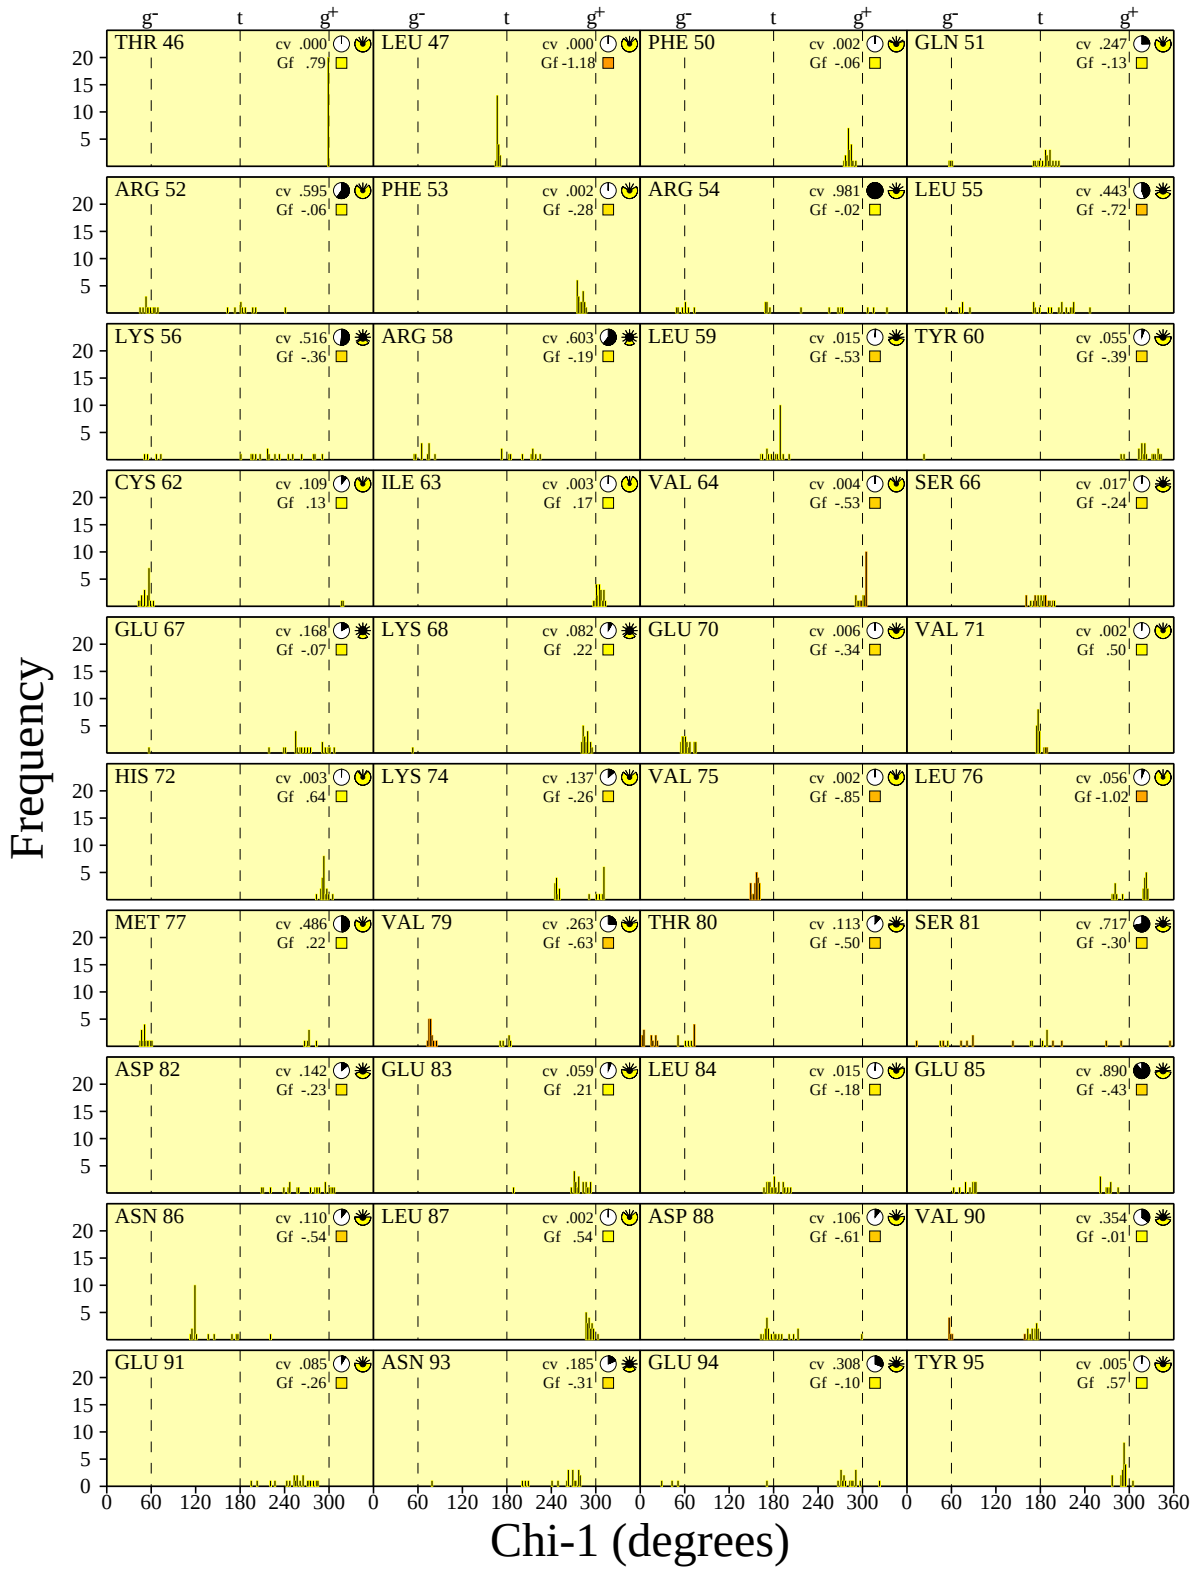


cv = Circular Variance (low values signify high clustering of the data points). Accessible Buried
Gf = Average G-factor for the residue (the higher the value the more favourable the conformations) based on analysis of high-res. Xstal structures
Data bars coloured according to G-factor: Favourable Unfavourable

# Chi-1 frequency distributions
## ensemble_analyzed (20 models)

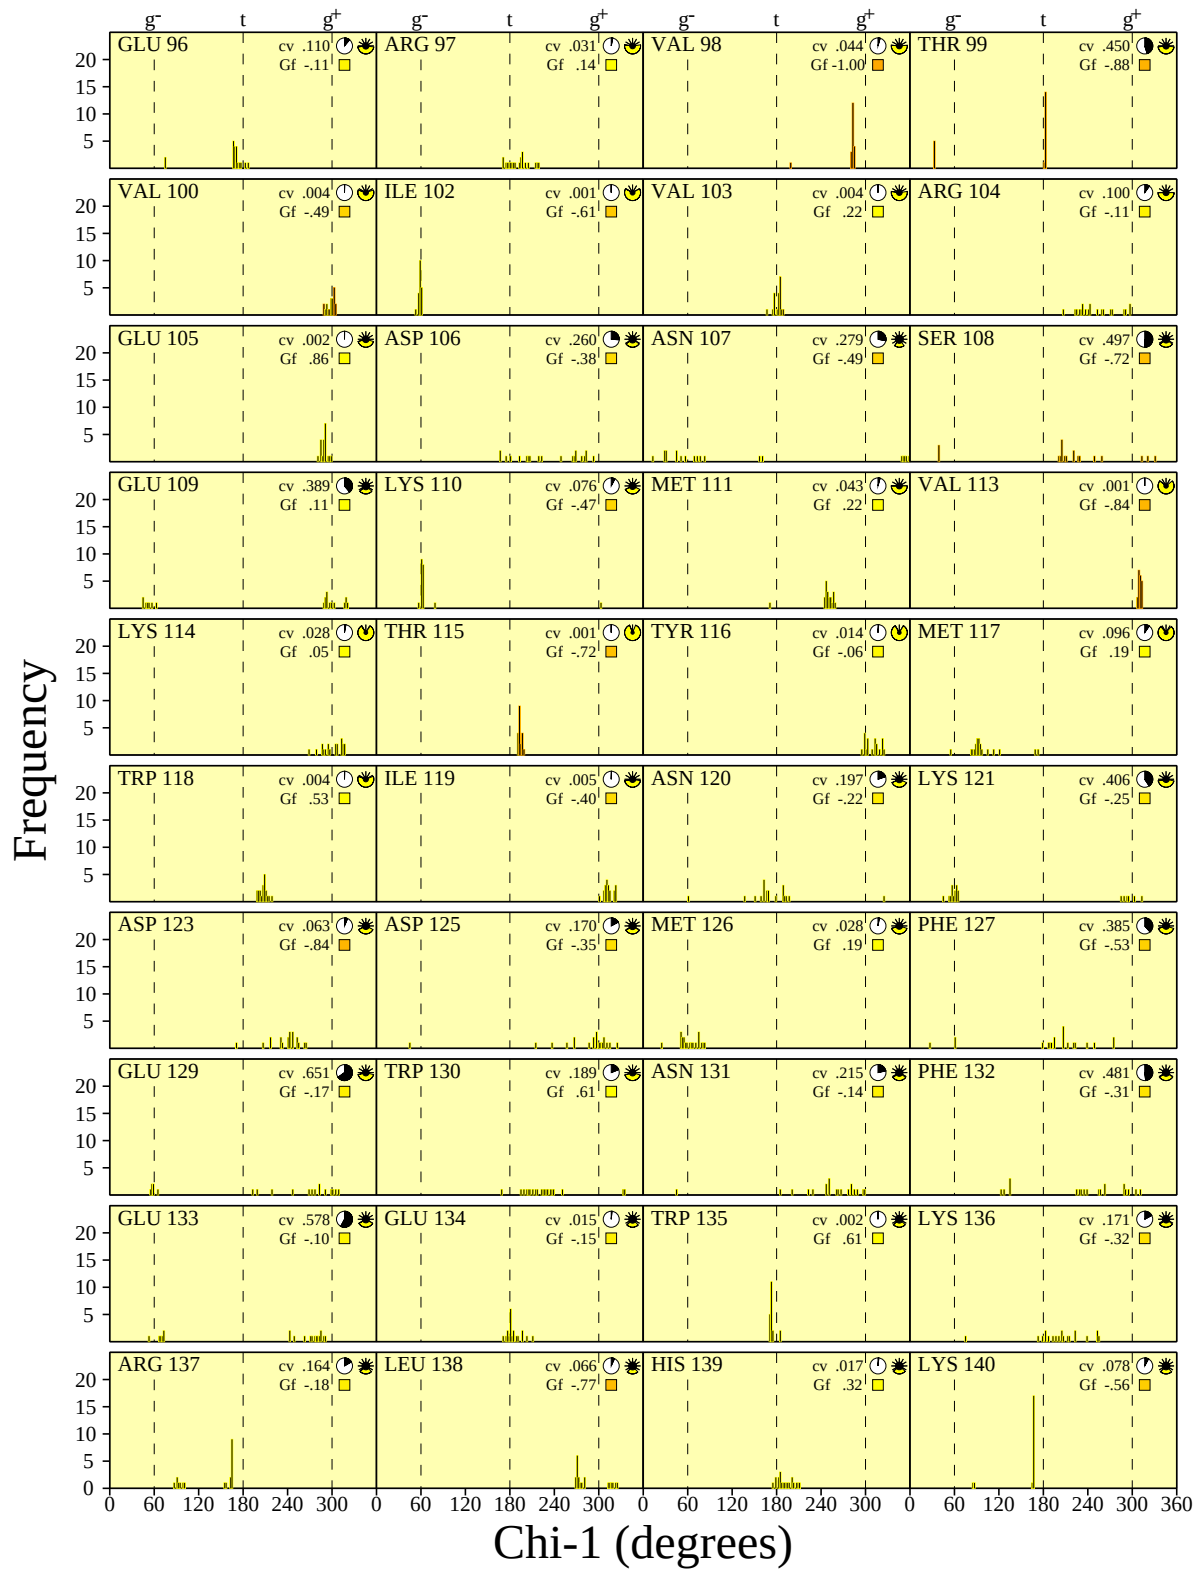


cv = Circular Variance (low values signify high clustering of the data points). Accessible Buried
Gf = Average G-factor for the residue (the higher the value the more favourable the conformations) based on analysis of high-res. Xstal structures
Data bars coloured according to G-factor: Favourable Unfavourable

# Chi-1 frequency distributions
## ensemble_analyzed (20 models)

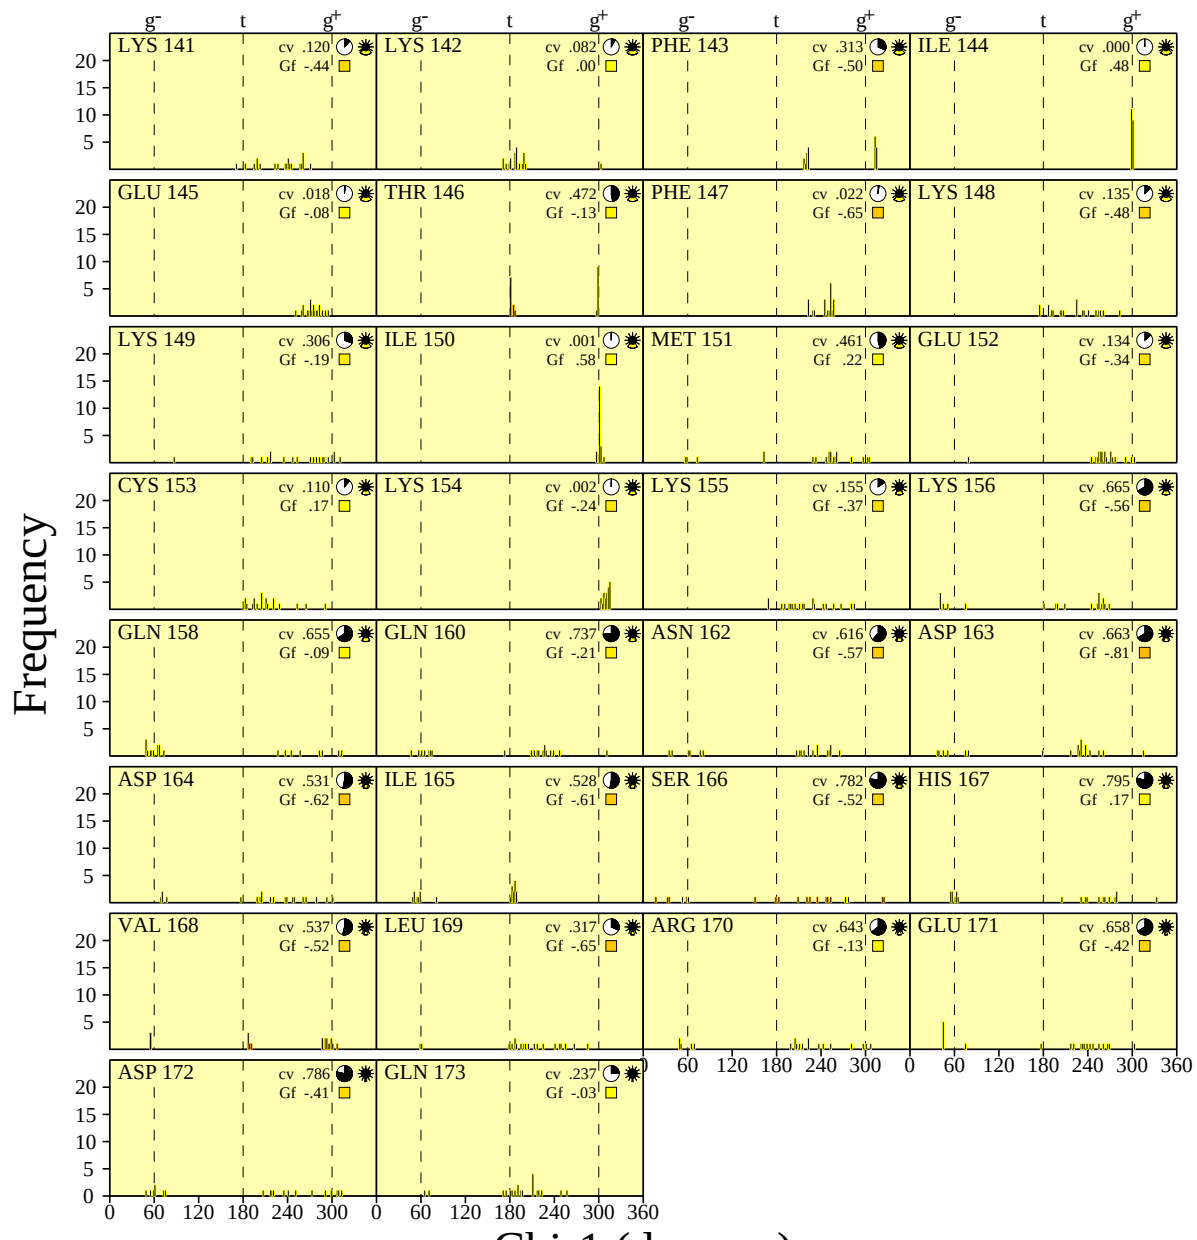


cv = Circular Variance (low values signify high clustering of the data points). Accessible Buried
Gf = Average G-factor for the residue (the higher the value the more favourable the conformations) based on analysis of high-res. Xstal structures
Data bars coloured according to G-factor: Favourable Unfavourable